


The Sensotek Tau® sensor range is used to continuously monitor your vibratory equipment. Reporting key parameters to our cloud based Analytix® platform, these values can be trended over time and used to identify faults or inefficiencies with your equipment.

The Sensotek Tau® Structure sensor range has been specifically developed to identify rotating patterns and key parameters for vibratory equipment:

Key Applications

- Vibrating Screens
- Feeders
- Crushers
- Any machine with a given motion:
 - Elliptical
 - Circular
 - Linear

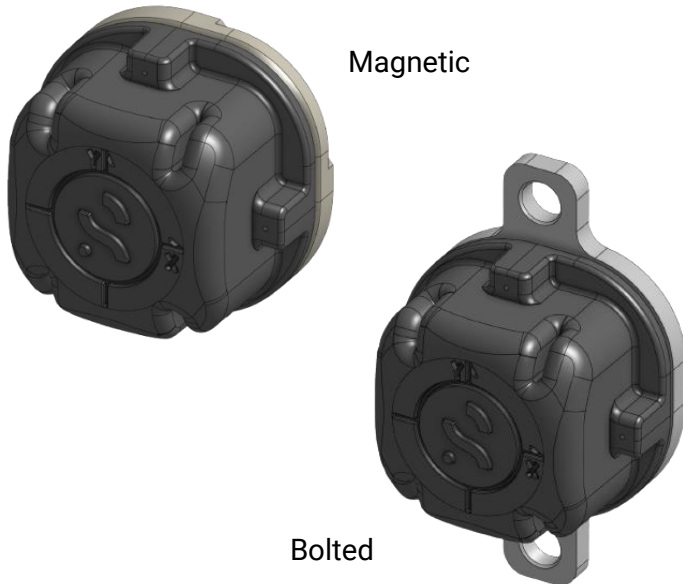

Magnetic

Bolted

Part Numbering (Options must be specified)

AN-S01-m01-S8C2

Mounting Options (<u>m</u>)	0 = Magnetic 1 = Bolted
-------------------------------	----------------------------

Mechanical	
Physical	
Dimensions	Shown on next page
Weight (Magnet)	260g
Weight (Bolted)	240g
Lid Material – Lid	POM-GF20
Material – Magnetic Base	Nickel Plated Mild Steel
Material – Bolted Base	Stainless Steel
Mounting Options (<u>m</u>)	0 = Magnetic 1 = Bolted
Environmental	
Operating Temperature	-40 to 85°C (-40 to 185°F)
Storage Temperature	-40 to 85°C (-40 to 185°F)
Sealing	IP69K
Shock	1000g


Power Source	
Battery	
Type	Non-Replaceable 3.6V
Chemistry	Lithium Thionyl Chloride
Life	3+ years
Impact to Life	Temperature, Transmission Rate Sampling Rate

Communication	
Data Sampling	
Time	10 seconds
Rate	5 minutes
Data Transmission	
Rate (Awake)	5 minutes
Rate (Sleep)	10 minutes
Effective Range	250 meters Line-of-Sight
Frequency	<1GHz ISM Band
Sensotek Channel	Channel 2

Measurements	
Temperature	
Temperature Range	-40 to 85°C (-40 to 185°F)
Temperature Accuracy	±2°C
Vibration	
Axes	X, Y, Z
Sampling Frequency	409.6Hz
Range - Acceleration	-8 to +8g

The Sensotek Tau® sensor range is used to continuously monitor your vibratory equipment. Reporting key parameters to our cloud based Analytix® platform, these values can be trended over time and used to identify faults or inefficiencies with your equipment.

Calculated Parameters	
Parameter	Unit
Stroke Length	mm
Stroke Angle	degrees
Phase Angle	degrees
Sensor Rotation	degrees
Running Speed	RPM or Hz
Deflection (Velocity)	mm/s
Deflection (Displacement)	mm
Peak Displacement (X/Y)	mm
Screen Uptime	5 minute resolution
Rotating Pattern	representative image

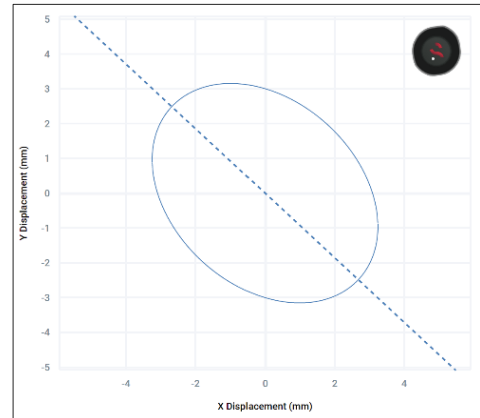

Dimensions by Mounting Method	
Magnetic	Bolted